



DIGITAL LIVING

iDialog Rack

1:1 600-1200 VA



UPS VFD



Rack



Plug & Play
installation



USB
plug



HIGHLIGHTS

- **Designed for telco racks**
- **Silent operation**
- **Auto restart**
- **Low power consumption**

MAXIMUM RELIABILITY IN THE PROTECTION OF VOIP SYSTEMS

The iDialog Rack range is the ideal solution for protecting PCs and peripherals in the home and office. iDialog Rack is easy to install and economic to run for protecting:

- IT equipment such as PCs, Media Centres and peripherals, TVs, Home Cinema systems, Satellite and Digital Terrestrial Receivers and Digital Living devices;
- xDSL modems and routers;
- Voip and network application.

SILENT OPERATION

The UPS is silent in operation (0 dBA) thanks to its use of a fan-free design and high frequency components.

ADVANCED COMMUNICATIONS

PowerShield³ software allows for the safe shutdown of connected IT systems on mains power supply failure. PowerShield³ provides efficient and intuitive UPS management using bar chart displays for important operating information.

AUTO RESTART

The UPS automatically restarts when the mains power supply is restored.

ECO LINE ENVIRONMENTAL PROTECTION


With energy savings in mind, the iDialog Rack range features a shut-off button to reduce energy consumption during periods of prolonged inactivity.

FEATURES

- Reduced energy consumption and 99% efficiency;
- Maximum reliability and protection of PC's thanks to PowerShield³ monitoring and shutdown software, which can be downloaded free at www.riello-ups.com;
- Can be installed on PCs with Windows operating systems 11, 10, 8, Server 2022, 2019, 2016 and previous versions, Windows Server Virtualization Hyper-V, macOS, Linux, Citrix XenServer and other Unix operating systems;
- Small size: with its compact shape, iDialog Rack can be placed in any small rack;
- Noise-free running: iDialog Rack is also suitable for protecting your non-professional digital equipment such as home cinema systems, satellite and digital terrestrial receivers and Digital Living devices.

DETAILS

IDR 600 - IDR 1200

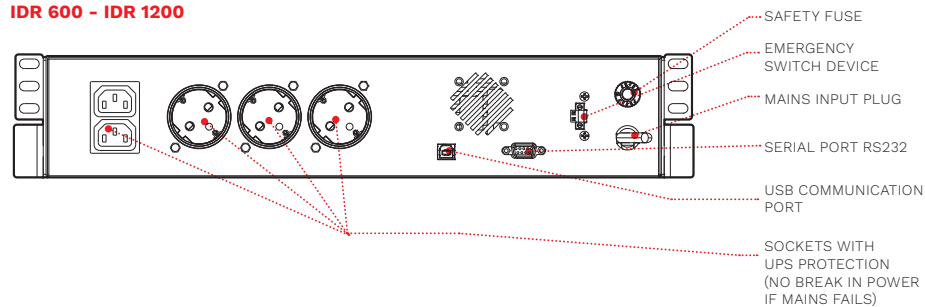

OPTIONS

SOFTWARE

PowerShield³

ACCESSORIES

NETMAN 208 + box

MULTICOM 302 + box

2-YEAR WARRANTY

| MODELS | IDR 600 | IDR 1200 |
|--|--|----------------------|
| POWER | 600 VA/360 W | 1200 VA/720 W |
| INPUT | | |
| Rated voltage [V] | 220 / 230 / 240 | |
| Voltage tolerance [V] | 230 (+20/-25%) | |
| Rated frequency [Hz] | 50 / 60 with automatic selection | |
| OUTPUT | | |
| Voltage during mains operation [V] | 230 (+20/-25%) | |
| Voltage during battery operation [V] | 230 (±10%) | |
| Frequency during battery operation [Hz] | 50 or 60 (±1%) | |
| Waveform | Pseudo Sinusoidal | |
| BATTERIES | | |
| Type | VRLA AGM maintenance-free lead based | |
| Recharge time | 6-8 h | |
| OVERALL SPECIFICATIONS | | |
| Net weight [kg] | 5.5 | 9 |
| Gross weight [kg] | 7 | 10.5 |
| Dimensions (WxDxH) [mm] | 438x230x87 | 438x300x87 |
| Packaging dimensions (WxDxH) [mm] | 503x330x211 | 503x400x211 |
| Protections | Excessive low battery - overvoltage - short circuit | |
| Communications | USB + RS232 | |
| Output sockets | 2x IEC 320 C13 (10 A) + 3 Shuko | |
| Standards | European directives: LV 2014/35/EU low voltage Directive EMC 2014/30/EU electromagnetic compatibility Directive Standards: Safety IEC EN 62040-1; EMC IEC EN 62040-2; RoHS compliant | |
| Certificates | CE | |
| Colour | RAL 9005 | |
| Ambient temperature for the UPS | 0 °C - +40 °C | |
| Recommended temperature for battery life | +20 °C - +25 °C | |
| Range of relative humidity | 5-95% non-condensing | |
| Standard equipment | Rack handles, user manual | |